


FF

## Antivibrante Cilindrico in Acciaio Zincato Femmina/Femmina

### Zinc Plated Double Female Cylindrical Mounting

Cod.	A	B	M	F	Carico max a Compres. Max Compression Load daN	Carico max a Taglio Max Shear Load daN
A1FF1515	15	15	04MA	4	15	2
A1FF2015	20	15	06MA	6	17	2
A1FF2020	20	20	06MA	6	20	2
A1FF2025	20	25	06MA	6	18	2
A1FF2030	20	30	06MA	6	16	2
A1FF2515	25	15	06MA	*	48	7
A1FF2520	25	20	06MA	6	45	5
A1FF2525	25	25	06MA	6	42	4
A1FF2530	25	30	06MA	6	35	3
A1FF3020	30	20	08MA	8	66	9
A1FF3030	30	30	08MA	8	61	8
A1FF3040	30	40	08MA	8	54	5
A1FF4030/8	40	30	08MA	8	98	15
A1FF4035/8	40	35	08MA	8	108	13
A1FF4040/8	40	40	08MA	8	108	13
A1FF4030/10	40	30	10MA	10	98	15
A1FF4040/10	40	40	10MA	10	108	13
A1FF5030	50	30	10MA	10	169	19
A1FF5040	50	40	10MA	10	144	17
A1FF5050	50	50	10MA	10	134	13
A1FF6030/10	60	30	10MA	10	210	30
A1FF6050/10	60	50	10MA	10	200	24
A1FF6030/12	60	30	12MA	12	210	30
A1FF6040/12	60	40	12MA	12	210	30
A1FF7530	75	30	12MA	12	390	90
A1FF7540	75	40	12MA	12	378	78
A1FF7550	75	50	12MA	12	373	68
A1FF10050	100	50	16MA	16	660	98
A1FF10055	100	55	16MA	16	636	78
A1FF10060	100	60	16MA	16	590	49

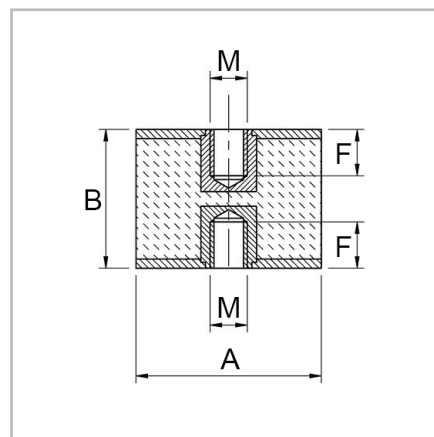

#### Caratteristiche

**Materiale corpo:** Mescola Gomma NR/SBR

**Durezza standard:** 60 shore A

**Tolleranza sulla durezza:** +/- 5 SH

**A richiesta:** Inserto femmina passante **Parte metallica e/o issaggio:**

Rondella zincata

**Tipo inserto standard:** Inserto femmina cieco

\*Inserto femmina aperto

Misure e durezza differenti producibili su richiesta, rivolgersi all'ufficio commerciale. La quota "F" può essere soggette a variazioni senza preavviso, ci riserviamo inoltre la facoltà di fornire antivibranti provvisti di inserto cieco o passante a seconda della disponibilità di parti metalliche.

#### Product specification

**Main part material:**

NR/SBR rubber compound

**Standard hardness:** 60 shore A **Hardness**

**tolerance:** +/- 5 SH

**On request:** Threaded through-hole

**Metallic part:** Zinc plated washer **Standard**

**thread:** Threaded blind hole

\*Female thread open end

Other sizes or hardnesses can be produced on demand. For information please contact our sales department. Dimension "F" can vary without notice. It is GeTech's discretion to supply antivibration mountings with threaded blind hole or with through hole depending on the metallic parts available.

Antivibranti Cilindrici • Cylindrical Mountings